

Instruction manual and data sheet sPCA-4Pi-05-3000-800-x

Photoconductive THz antenna for laser excitation wavelengths $\lambda \sim 800$ nm



PCA – Photo Conductive Antenna

Table of contents:

1. Spectral performance	2
2. Antenna parameters	3
3. Antenna design	4
4. Order information	5



1. Spectral performance

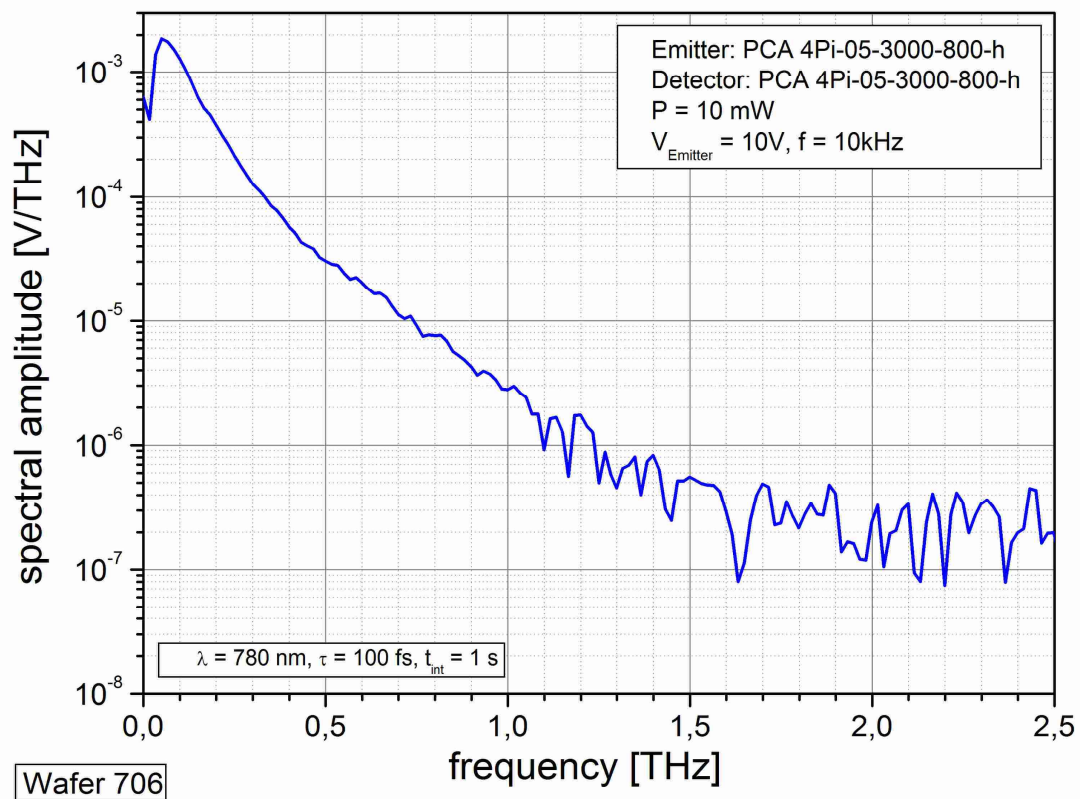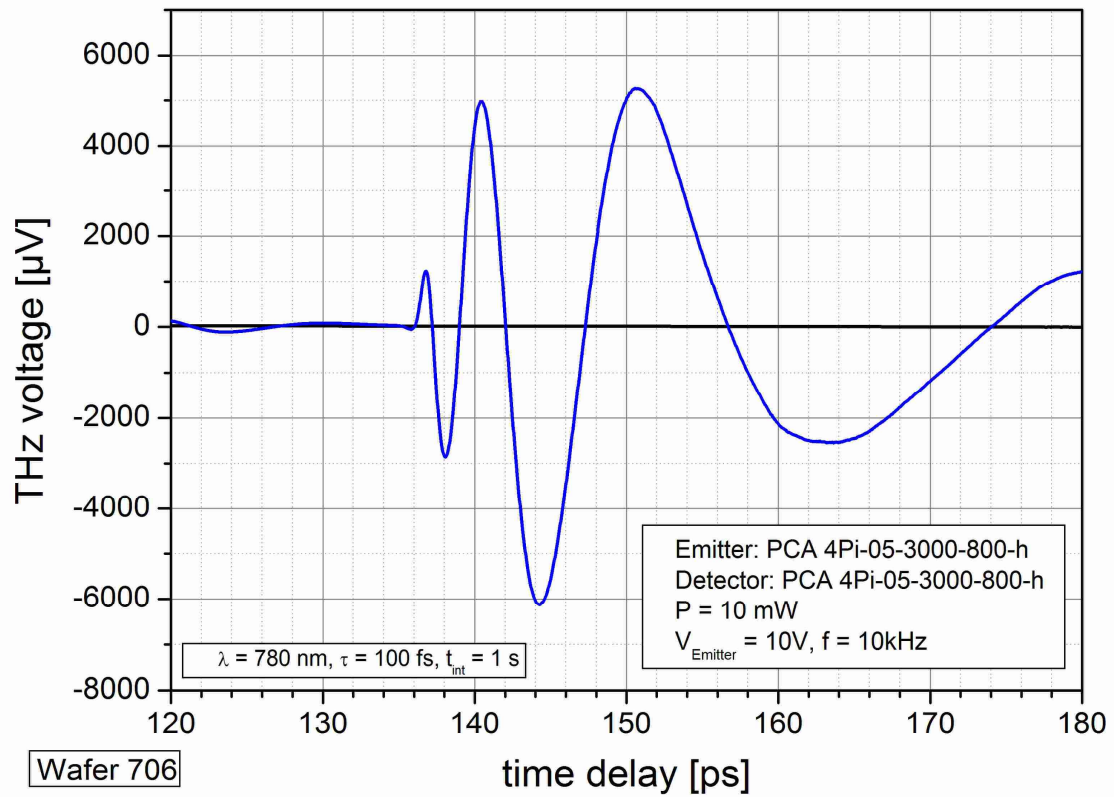

2. Antenna parameters

Parameter	minimum ratings	standard	maximum ratings
Dark resistance	3 MΩ	5 MΩ	10 MΩ
Voltage		10 V	15 V
Optical mean power @ 50 – 100 MHz repetition rate		10 mW	15 mW
Pulse fluence		200 μJ/cm ²	250 μJ/cm ²

Attention: The F-number of the optical lens focusing the laser beam onto the antenna gap must be larger than a certain value to avoid too high pulse fluency. This means, that the minimum diameter of the focused beam waist must be about 120 % of the gap distance g . For a Gaussian beam the minimum focus length f_{\min} of the optical lens can be estimated as

$$f_{\min} = \frac{0.3 \cdot \pi \cdot g \cdot D}{\lambda}$$


with g – gap distance of the antenna

λ - laser wavelength

D – diameter of the laser beam hitting the focusing lens.

For $\lambda = 0.8 \mu\text{m}$ and $g = 5 \mu\text{m}$ the minimum possible F-number of the lens is $f_{\min}/D = 1.9\pi$.

Current-voltage characteristics

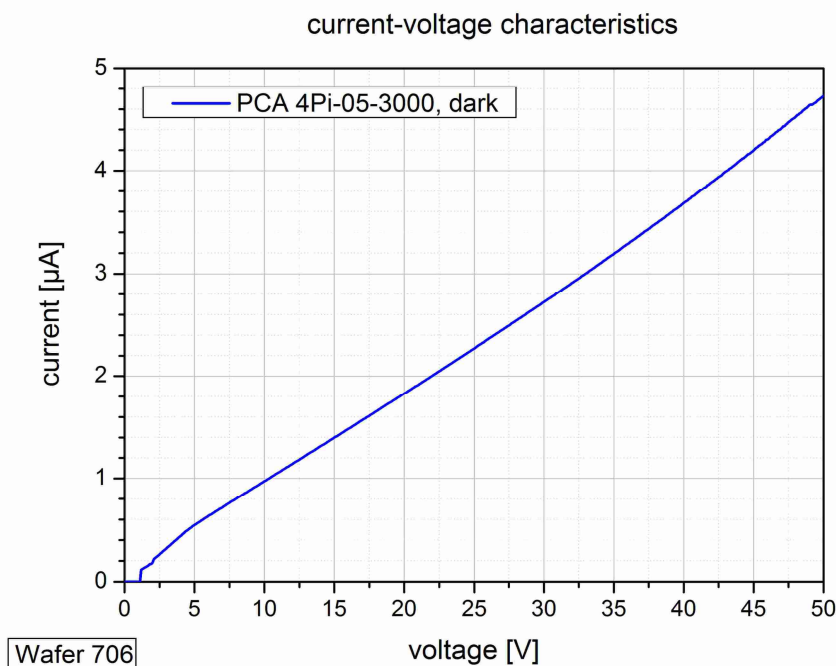

3. Antenna design


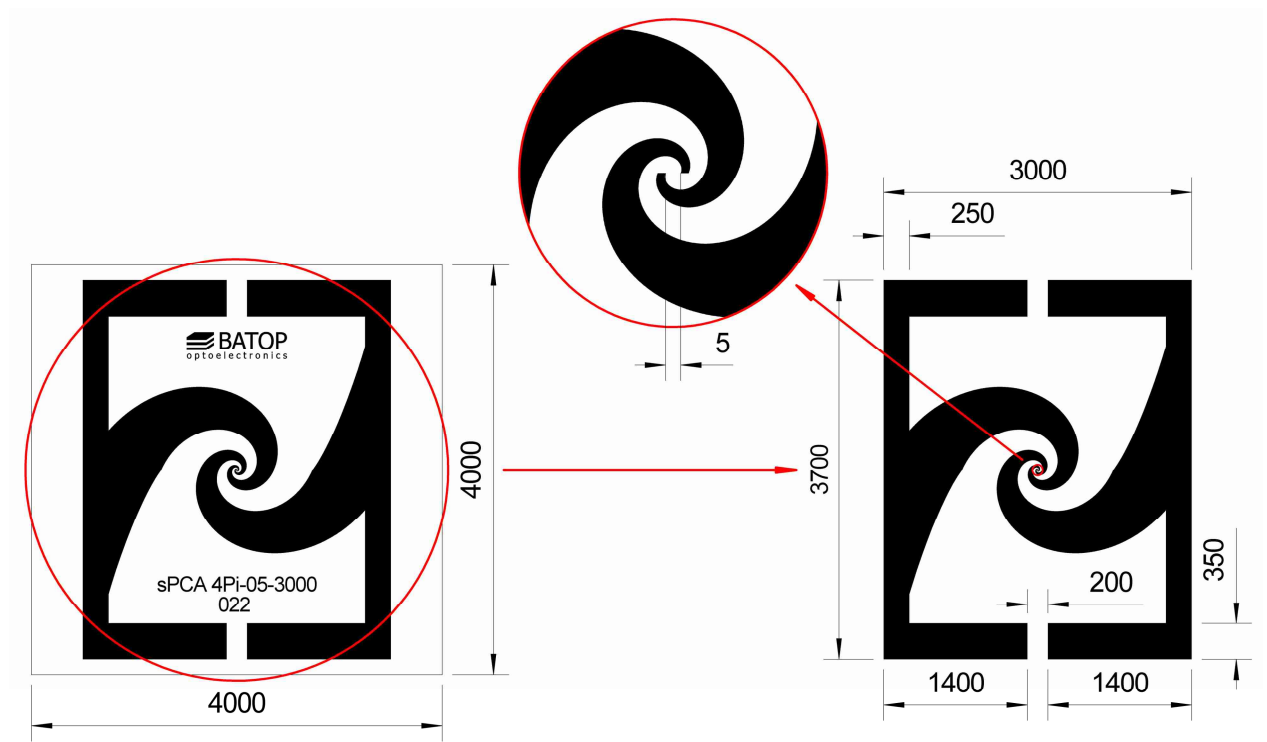


Photo SPCA-4Pi-05-3000 (survey)

Photo SPCA-4Pi-05-3000 (detail)

Dielectric cover

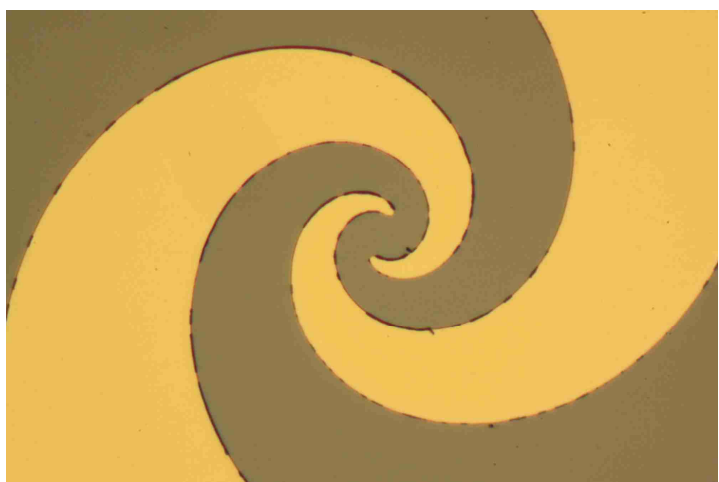

4. Order information

PCA-4Pi-05-3000-800-x Photoconductive antenna
spiral angle = 4 Pi
gap g = 5 μm
spiral diameter w = 3000 μm
laser wavelength λ = 800 nm

x denotes the type of mounting as follows:

- x** = 0 unmounted chip 4 mm x 4 mm with 2 bond contact pads
- x** = h mounted on an Al disc with 25.4 mm \varnothing and [hyperhemispherical silicon substrate lens](#), 1m coaxial cable with BNC or SMA connector
- x** = a mounted on an Al disc with 25.4 mm \varnothing and [aspheric focusing silicon substrate lens](#), 1m coaxial cable with BNC or SMA connector
- x** = c mounted on an Al disc with 25.4 mm \varnothing and aspheric collimating silicon substrate lens CL-12 for 12 mm THz beam diameter, 1m coaxial cable with BNC or SMA connector
- x** = h-f [fiber coupled antenna](#) with hyperhemispherical silicon substrate lens
- x** = l with [aspheric focusing optical lens](#) for free space laser excitation
- x** = p with [preamplifier](#) for detector antenna

For information about THz beam guiding possibilities please [click here](#)